



BK

Features


- Even light distribution over the entire beam.
- Universal burning position.
- Colour temperature: 3100 K.
- Very compact filament enabling high efficiency.
- Optimum between light and life for Disco applications.

Applications

- These lamps are especially suitable for disco, moving beam, luminaires.



Type	ANSI code	LIF code	Lamp voltage V	Lamp wattage W	Reflector diameter in mm	Reflector surface	Reflector coating	Burning position	Cap/Base	Lamp Life h	Ordering number
6834/5H	EFP/5H	A1/231-5H	12	100	50	SMOOTH	DICHROIC	ANY	GZ6.35	500	9240 565 17100
JCR 15-150 H5	EFR/5H	A1/223-5H	15	150	50	SMOOTH	DICHROIC	ANY	GZ6.35	500	9247 936 18500
JCR 24-250 H5	ELC/5H	A1/259-5H	24	250	50	SMOOTH	DICHROIC	ANY	GX5.3	500	9248 627 20500

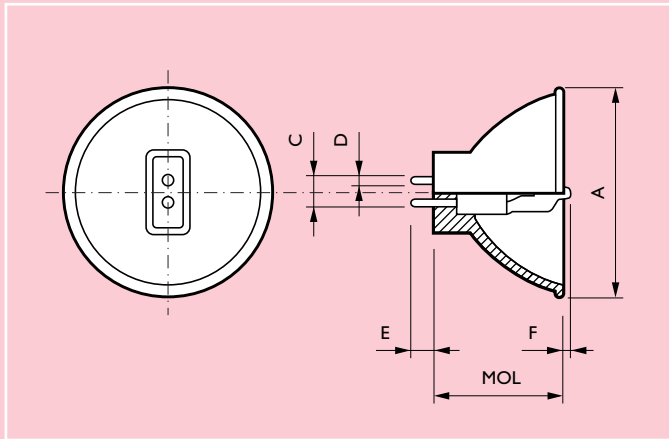

Dimensions in mm

Type	A	C	D	E	F	MOL
6834/5H	50	6.35	∅ 1	6	< 0	42
JCR 15-150 H5	50	6.35	∅ 1	6	< 0	43
JCR 24-250 H5	50	5.3	∅ 1.5	4.9	< 0	44.5

Permissible temperatures

- Pins 300 °C max.
- Pinch 350 °C max.
- Quartz bulb 250 °C min.
- Quartz bulb 900 °C max.